

A

B

C

D

A




B

C


D

123456

123456

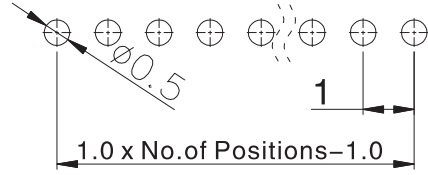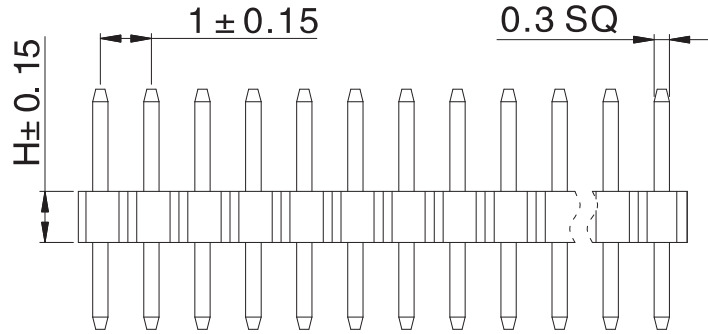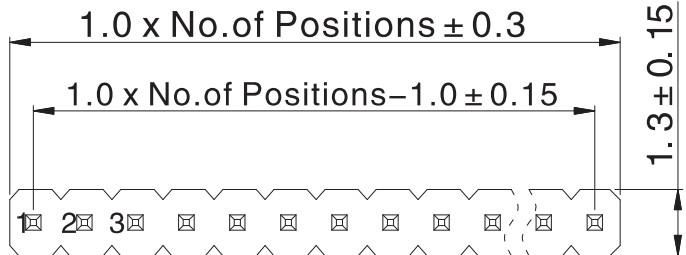


RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

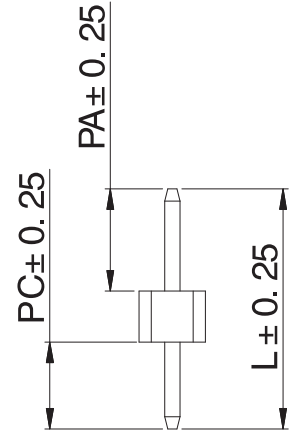

SPECIFICATIONS (规范)>>>
Current Rating (额定电流): 0.75Amps
Withstanding Voltage (耐电压): AC 500Vmin/Minute
Insulation Resistance (绝缘电阻): 1000MΩ Min
Contact Resistance (接触电阻): 20 mΩ MAX
Operation Temperature (工作温度): -40℃to+105℃
Material (材料)>>>
Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
Color (塑胶颜色): Black
Insrlator Material (绝缘材料): Polyester (UL94V-0)
Contact Material (接触材料): Brass
Contact Plating (接触电镀): Au 0s Sn over 40u" Ni

Dimension antitheses list(尺寸对照表)							
项 目		L	H	PA	PC	SQ	W
常规尺寸		5.0	1.0	2.0	2.0	0.3	1.3
客户需要							

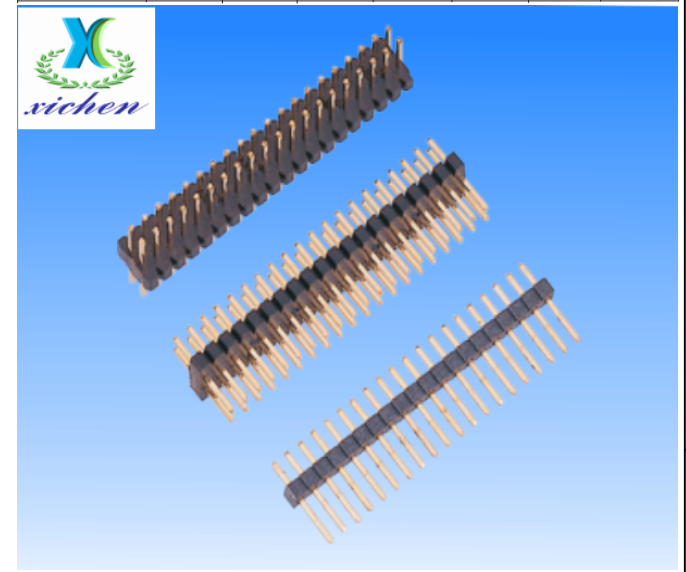

电话 (tel)	0755-23317175	 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd					
传真 (fax)	0755-23010246						
单位 (units)	MM	设计 (draw)	王 刚	图名 (name)	PH1.0 单排180度		
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊				
版次 (rev.)	A / 1	核准 (app' d)	李新亮	料号 (Part number)			
视图 (view)		日期 (date)		图档 (File Name)			