



1 2 3 4 5 6


A

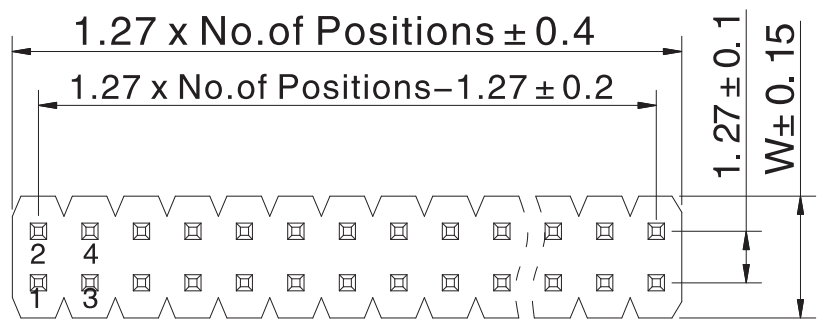

B

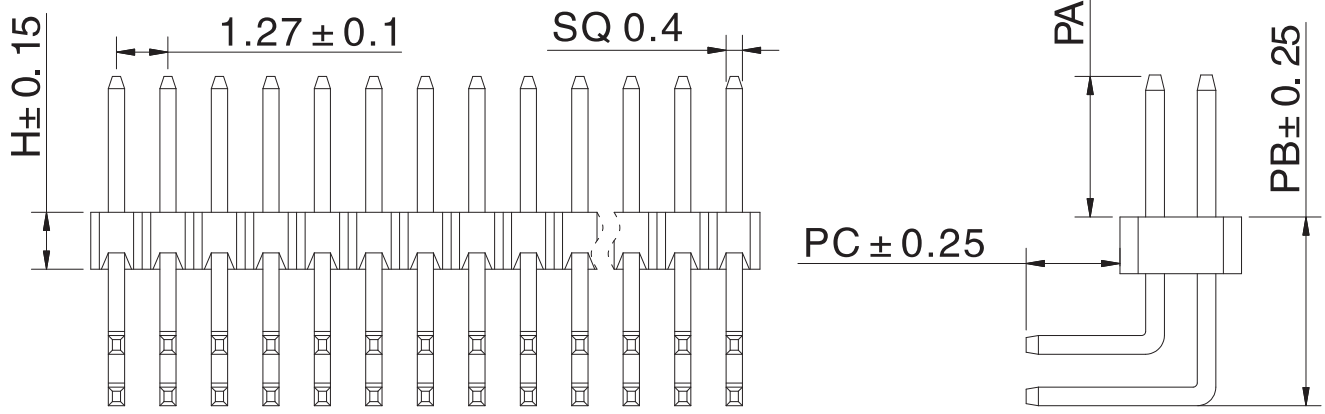

C

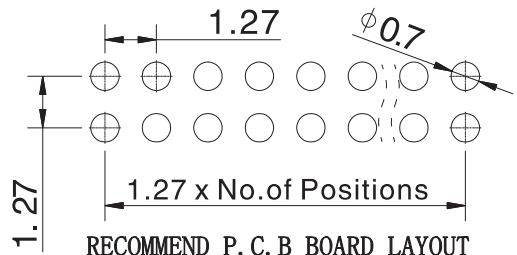

D


RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 1.0Amps
Withstanding Voltage (耐电压): AC 500Vmin/Minute
Insulation Resistance (绝缘电阻): 1000MΩ Min
Contact Resistance (接触电阻): 20 mΩ MAX
Operation Temperature (工作温度): -40℃to+105℃
Material (材料)>>>
Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
Color (塑胶颜色): Black
Insrlator Material (绝缘材料): Polyester (UL94V-0)
Contact Material (接触材料): Brass
Contact Plating (接触电镀): Au 0s Sn over 40u" Ni

Dimension antitheses list(尺寸对照表)

项 目	H	PA	PC	PB	Q	W	L
常规尺寸	1.0 2.5	4.0	2.2	2.4	0.4	2.4	9.8 12.3
客户需要							

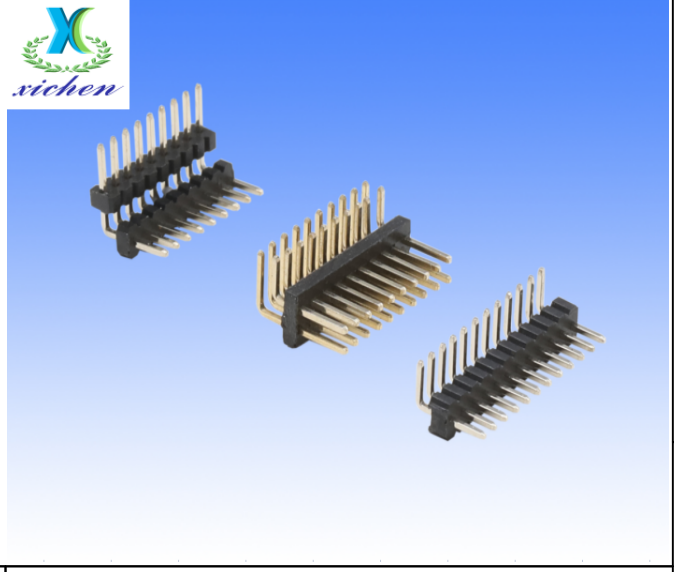

电话(tel)	0755-23317175	 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd					
传真(fax)	0755-23010246						
单位(units)	MM	设计(draw)	王 刚	图名(name)	PH1.27 双排90度		
比例(scale)	1 : 1	审核(ch'k)	陈晓俊				
版次(rev.)	A / 1	核准(app'd)	李新亮	料号(Part number)			
视图(view)		日期(date)		图档(File Name)			

1 2 3 4 5 6