
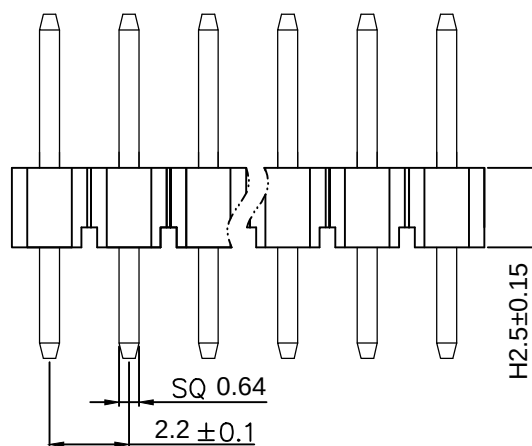
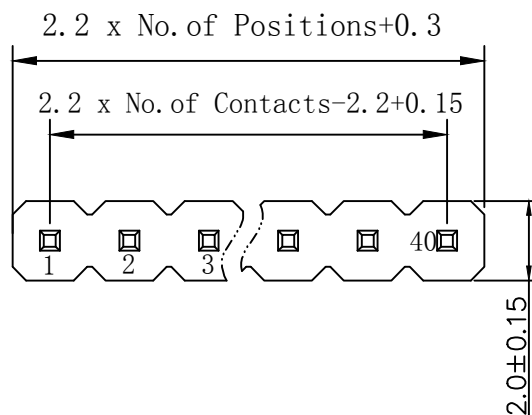


RECOMMEND P. C. B BOARD LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

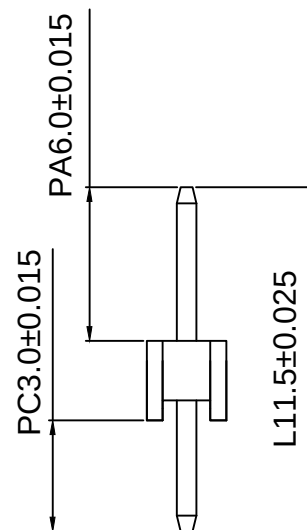

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 3.0Amps

Withstanding Voltage (耐电压): AC 1000Vmin/Minute

Insulation Resistance (绝缘电阻): 1000MΩ Min

Contact Resistance (接触电阻): 20 mΩ MAX

Operation Temperature (工作温度): -40℃to+105℃

Material (材料)>>>


Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF

Color (塑胶颜色): Black

Insulator Material (绝缘材料): Polyester (UL94V-0)

Contact Material (接触材料): Brass

Contact Plating (接触电镀): Au 0s Sn over 40u" Ni

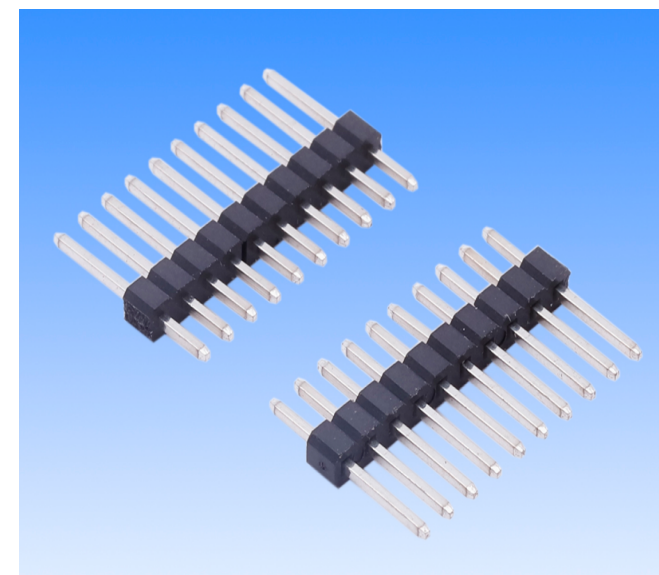

电话(tel)		0755-23317175		 深圳市熙宸电子科技有限公司 <i>xichen</i> Shenzhen xichen Electronics Technology Co.,Ltd	
传真(fax)		0755-23010246			
单位(units)	MM	设计(draw)	王 刚	图名(name)	PH2.2 单排180度
比例(scale)	1 : 1	审核(ch'k)	陈晓俊		
版次(rev.)	A / 1	核准(app'd)	邓志飞	料号(Part number)	
视图(view)		日期(date)		图档(File Name)	