
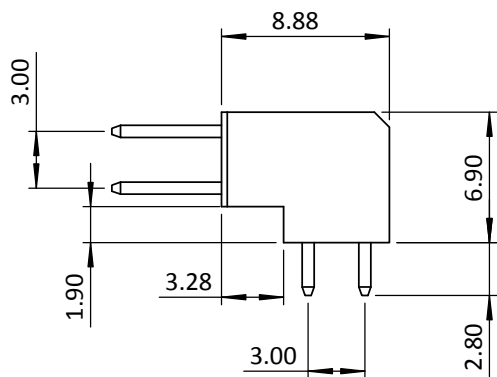
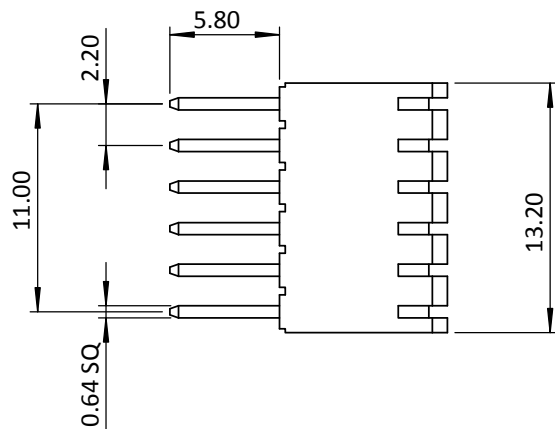


P.C.B LAYOUT

SPECIFICATIONS (规范)>>>

Current Rating	(额定电流): 3.0Amps
Withstanding Voltage	(耐电压): AC 1000Vmin/Minute
Insulation Resistance	(绝缘电阻): 1000MΩ Min
Contact Resistance	(接触电阻): 20 mΩ MAX
Operation Temperature	(工作温度): -40℃to+105℃
Material (材料)>>>	
Plastic material	(塑胶材质): PA6T/PA9T/LCP+30%GF
Color	(塑胶颜色): Black
Insrlator Material	(绝缘材料): Polyester(UL94V-0)
Contact Material	(接触材料): Brass
Contact Plating	(接触电镀): Au 0s Sn over 40u" Ni

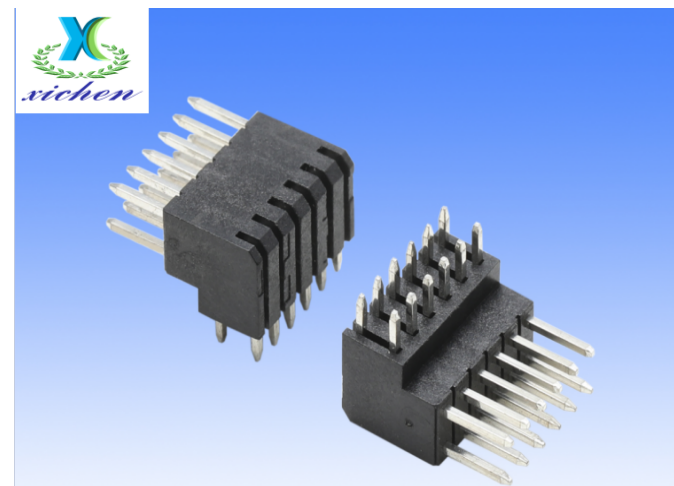

电话(tel)	0755-23317175	 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd			
传真(fax)	0755-23010246				
单位(units)	MM	设计(draw)	王 刚	图名(name)	PH2.2 2X6P 90度 H8.8 成型PIN
比例(scale)	1 : 1	审核(ch'k)	陈晓俊		
版次(rev.)	A / 1	核准(app'd)	邓志飞	料号(Part number)	
视图(view)		日期(date)		图档(File Name)	