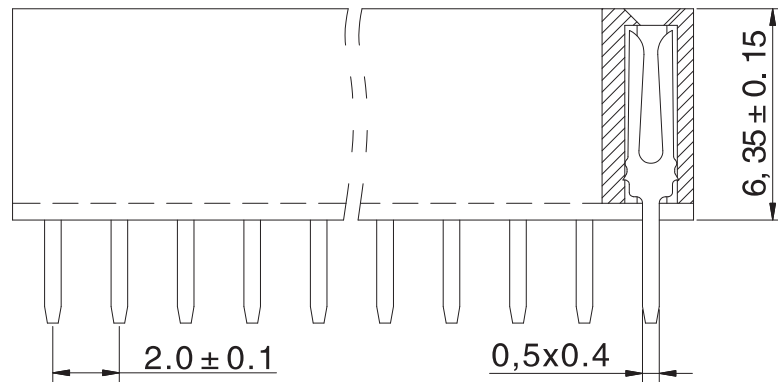
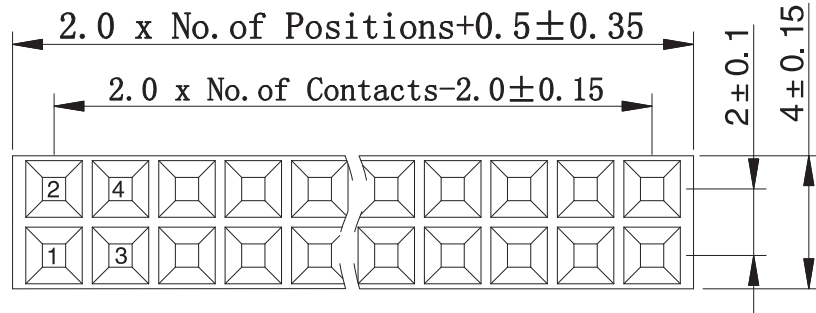



RECOMMEND P. C. B BOARD LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 1.5Amps
Withstanding Voltage (耐电压): AC 500Vmin/Minute
Insulation Resistance (绝缘电阻): 1000M Ω Min
Contact Resistance (接触电阻): 20 m Ω MAX
Operation Temperature (工作温度): -40 $^{\circ}$ C to +105 $^{\circ}$ C
Material (材料)>>>
Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
Color (塑胶颜色): Black
Insulator Material (绝缘材料): Polyester (UL94V-0)
Contact Material (接触材料): Brass
Contact Plating (接触电镀): Au 0s Sn over 40u" Ni

Dimension antitheses list (尺寸对照表)

项 目	H	PC	W				
常规尺寸	6.35	3.0	4.0				
客户需要							

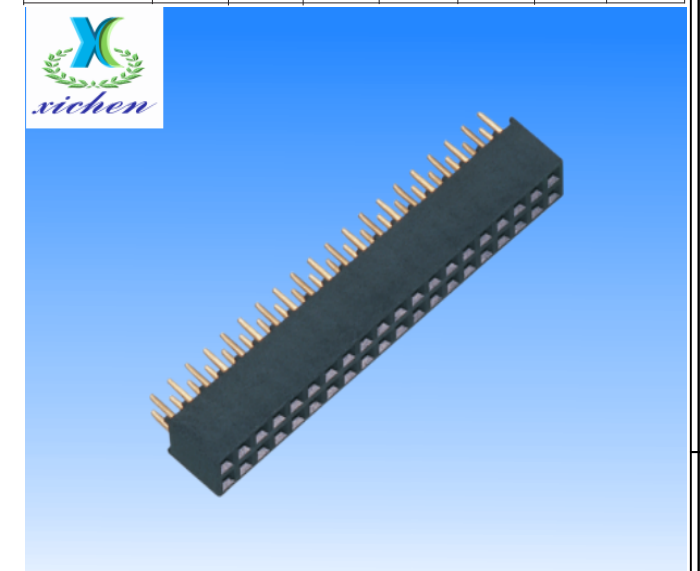

电话 (tel)	0755-23317175	 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co., Ltd					
传真 (fax)	0755-23010246						
单位 (units)	MM	设计 (draw)	王 刚	图名 (name)	PF2.0 双排180度 H6.35 Y型		
比例 (scale)	1 : 1	审核 (ch'k)	陈晓俊				
版次 (rev.)	A / 1	核准 (app' d)	李新亮	料号 (Part number)			
视图 (view)		日期 (date)		图档 (File Name)			