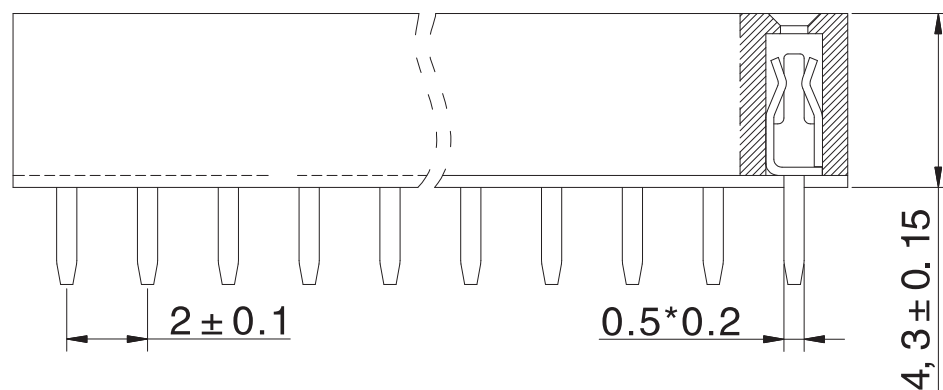
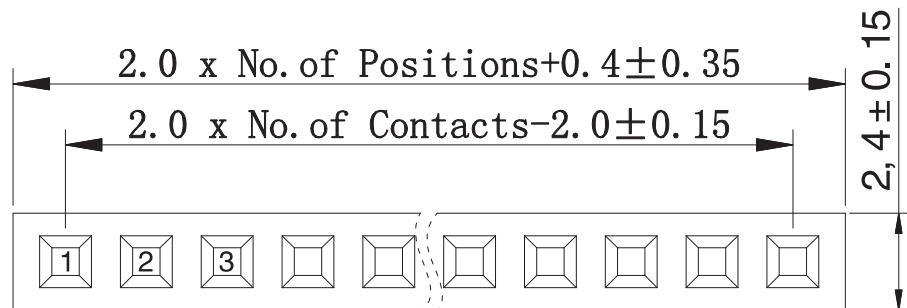


RECOMMEND P. C. B BOARD LAYOUT


PCB TOLERANCE: ± 0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 1.5Amps
 Withstanding Voltage (耐电压): AC 500Vmin/Minute
 Insulation Resistance (绝缘电阻): 1000M Ω Min
 Contact Resistance (接触电阻): 20 m Ω MAX
 Operation Temperature (工作温度): -40 $^{\circ}$ C to +105 $^{\circ}$ C
 Material (材料)>>>
 Plastic material (塑胶材质): PA6T/PA9T/LCP+30%GF
 Color (塑胶颜色): Black
 Insrlator Material (绝缘材料): Polyester (UL94V-0)
 Contact Material (接触材料): Brass
 Contact Plating (接触电镀): Au 0s Sn over 40u" Ni

Dimension antitheses list(尺寸对照表)

项 目	H	PC	W				
常规尺寸	4.3	2.4 2.8	2.4				
客户需要							

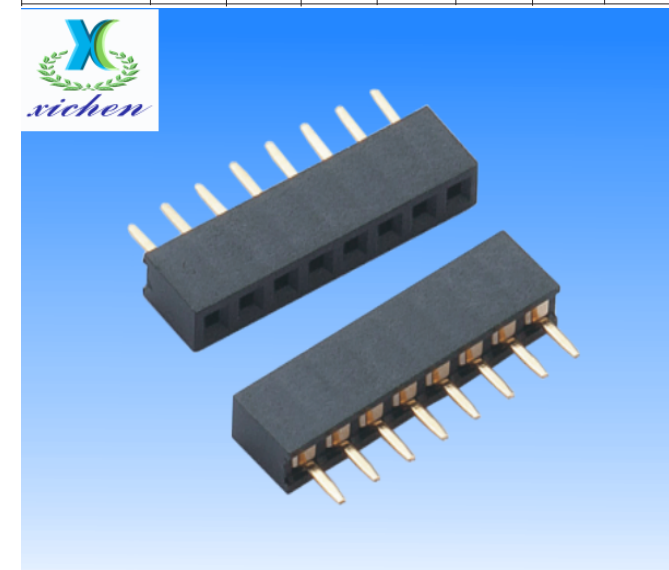

电话(tel)	0755-23317175	 深圳市熙宸电子科技有限公司 Shenzhen xichen Electronics Technology Co.,Ltd					
传真(fax)	0755-23010246						
单位(units)	MM	设计(draw)	王 刚	图名(name)	PF2.0 单排180度 H4.3 U型 防漏锡		
比例(scale)	1 : 1	审核(ch'k)	陈晓俊				
版次(rev.)	A / 1	核准(app' d)	李新亮	料号(Part number)			
视图(view)		日期(date)		图档(File Name)			